

'BeClever' BUILT-IN ROLLER SHUTTER ORDER FORM


CUSTOMER:

Order No.


Ordered on

Date of delivery

Type of mounting (column 4)

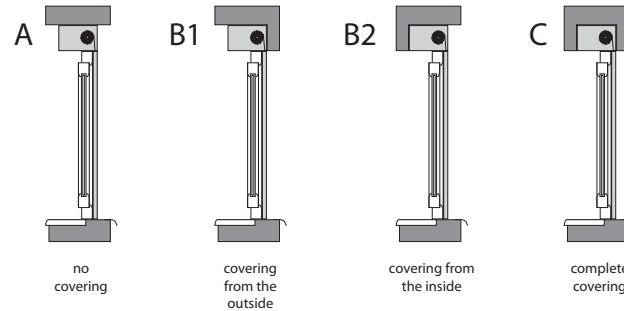

Control side (column 15)



Type of actuator

	ONE
	SIMU
	SOMFY
	ELERO

	side guides cut to size
	side guides 2 cm longer

	HEAVY DUTY PACKAGING
--	----------------------

Lp.	Overall width (mm)	Overall height (mm)	Quantity (pcs)	Type of mount	Box size (mm)	Colour of box			Box insulation*		Colour of side guides	Type of profiles	Colour of profiles	Colour of end slat	Insect screen included	Security device			Control				Mounting elements		Control (a view from the inside)	
						Covers			polystyrene foam	Neopor						bolt	automatic bolt	LOCK TO PLAY brackets (motorised roller shutter)	manual		motorised		anchor bolt	Stabilizing console	Control	
						outer front	inner front	bottom service cover											box coiler	tape	standard	radio			L	R
	1	2	3	4	5	6			7		8	9	10	11	12	13			14				15		16	
1																										
2																										
3																										
4																										
5																										
6																										
7																										
8																										
9																										
10																										

Please note:

- Standard roller shutter less than 1,6m wide is **not reinforced** with steel at the front.
- Standard roller shutter less than 2m wide is **not reinforced** with steel at the bottom.
- B1, B2, C type of mounting a plaster profile is used (white, brown) – see Extra Charges Price List.
- A balcony shutter order must have a drawing attached (a view from the inside).
- *Should you **fail to indicate** box insulation (column 7) the roller shutter will be manufactured with polystyrene foam. Neopor insulation is an option at an extra charge - see Extra Charges Price List.
- 9 m coiler is used with with shutters higher than 2200 mm.

COMMENTS: