

CUSTOMER:

Bracket

Stacking options*
- movement of slats in relation to control unit

Order No.





Ordered on

Date of delivery


Head rail

A – wall mount


B – top fixing



①



②




④

Package number	Overall width (mm)	Overall height (mm)	Quantity (pcs)	Fabric symbol	Slat width		Stacking options*			Colour of accessories				Bracket		Valance		Length of wand**
					127 mm	89 mm	1	2	4	white	silver	anthracite	black	A	B	straight	with sides	
1	2	3	4	5	6		7			8				9		10		11

Please note:

- The standard blind is fitted with a head rail, a link runner without a hook and a B bracket (colour-coordinated with accessories).
- ** The length of a standard operating wand:
 - in blinds > 2000 mm – height of blind minus 1500 mm,
 - in blinds < 2000 mm – half of the blind's height.
- The range of operating wand lengths available is 100 mm to 3000 mm (the wand is cut every 100 mm – the lengths on offer are: 100, 200, 300, 400 mm etc.)
- The slats for blinds of overall height over 4000 mm are sewn (not glued or welded).

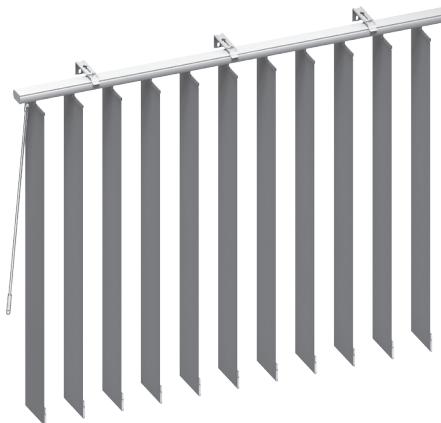

Comments: